


KSRSF

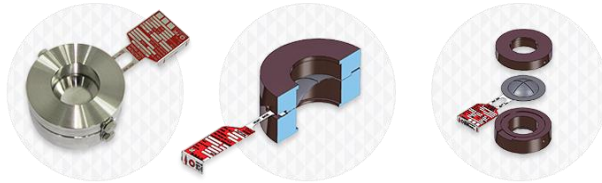

Design		Product Features	
Forward Dome Scored Type		Highly safe and resistant to corrosion	
It is used with installation on FDC standard holder		Favourable for counterpressure, vacuum and pulsation conditions	
Carved structure with Scored Damage processed precisely ruptured by tension		Long life of disc as there is small gap between working pressure and rupture pressure	
		Vacuum Support is needless	
		Wide range of workable temperature	
		It is applied to high pressure mainly	
Specification			
Standard	ASME Code Sec.VIII, KS B ISO 4126, API RP520, KOSHA Code, FDC Standard		
Size	1/2" ~ 18"		
Set. Pressure	5 ~ 700kg/cm ²		
Temperature	Max. 593°C		
Material	C.S, SUS, Duplex, Nickel, Inconel, Monel, Hastelloy, Titanium, Tantalum, Special Alloy, Aluminum		
Fragment	No		
Process Media	Gas, Vapor, Liquid		
Max. Operating Ratio	80%		
Spark	No		
Option	Pressure Gauge, Burst Sensor, Excess Flow Valve, Alarm System, Long & Short Nipple, Junction Box, Stud Bolt/Nut, PFA/PTFE Coating, Jack Screw, Tee, J-Hook, Plug, Pressure Switch, Reducer		